

LUBEChecker

GREASE BEARINGS RIGHT



Focused

Poor lubrication practices are a leading cause of bearing failure. LUBEChecker is an ultrasound solution focused on optimizing grease replenishment. It is the perfect companion for performing lubrication on condition based intervals.


Simple

LUBEChecker is so easy to use. Simply open the box, connect it to your grease gun, and hear the difference. Its vibrant colour display offers repeatable, accurate, digital measurements that guide you to a precision result every time.

Affordable

Failed bearings and excessive grease consumption gnaw away at your bottom line. LUBEChecker is the affordable solution. Built with SDT quality, it's offered at a price that makes you want to Hear More.

SDT Lubrication Handbook

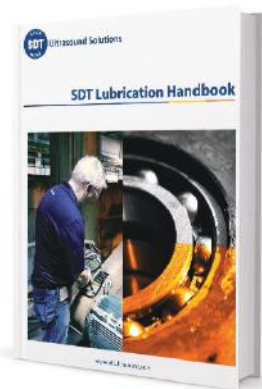

Download for free today
on our website



Ultrasound Solutions

LUBEChecker features

Description

LUBEChecker is an ultrasound solution designed to optimize bearing lubrication. This intuitive device ensures bearings receive the right amount of grease at intervals dictated by condition, not run time. LUBEChecker uses LUBESense, a robust, repeatable sensor built to withstand harsh conditions

Kit Contents

- LUBEChecker
- LUBESense
- Lube Adaptor
- Grease gun attachment
- Flat Magnetic Foot
- Curved Magnetic Foot
- Sensor cable
- USB Cable
- Headphones
- Screwdriver
- 2 AA Batteries
- Carrying case



General	
Function	Ultrasound measurement device
Operable with	LUBESense
Measurement channel	1 channel via a 7 pole LEMO connector
Display	160x128 pixels Color OLED
Keyboard	5 function keys
Measuring range	-6 to 99.9 dBµV (reference 0 dB = 1 µV)
Resolution	0.1 dBµV
Measurement bandwidth	35 to 42 kHz
Signal amplification	+30 to +102 by step of 6 dB
Environmental	
Operating temperature range	-10 to +50 °C 14 to 122°F
IP rating	IP42
Mechanical	
Housing material	ABS
Dimensions housing	158x59x38.5 mm 6.22"x2.32"x1.51"
Flexible rod length (Removable sensor)	445 mm 17.51"
Weight	164g 5.78oz
Power	
Battery	2 AA batteries
Autonomy	4 hours
Audio	
Amplification	5 adjustable positions in steps of 6 dB
Operable with	SDT provided head set only
Maximum output	+83dB SPL with SDT headset
Headset	25dB NRR Peltor HQ headset

The SDT Checkers range :

Ultrasound detectors that solve four major reliability problems.

LEAKChecker : Find compressed air and vacuum leaks

TRAPChecker : Assess the condition of traps and valves

LUBEChecker : Optimize bearing lubrication

TIGHTChecker : Verify the tightness of closed volumes.



SDT: leader in acoustic detection for industrial maintenance

SDT provides ultrasound solutions that help our customers gain a better understanding about the health of their factory. We help them predict failures, control energy costs, and improve product quality while contributing to the overall reliability of their assets.



Ultrasound Solutions